

25 TON OPEN THROAT & ECONOMY PRESS

This rugged press does the work of some of the big presses at a not-so-big price. It's ideal for many of the "in-between" jobs you see almost daily. The working area under the ram makes positioning of even bulky work fast and easy. Your choice of hand pump or remote control electric pump plus a spring return ram with 6 1/4" stroke are a perfect combination for frequently performed pressing jobs. Rapid ram advance and return also saves time on those repetitive jobs. A handy winch and cable mechanism quickly and easily raises and lowers the press bed to desired working height, locking securely into place.

- **RUGGED, YET REASONABLY PRICED PRESS FOR THOSE FREQUENTLY PERFORMED PRESSING JOBS.**
- **LOWER BED ADJUSTS TO DESIRED HEIGHT**


SPECIFICATIONS

Pump electrical specifications

PE17 Series - 1/2 h.p., 115 volt, 60 cycle, single phase.

PE21 Series - 1 h.p., 115 volt, 60 cycle, single phase.

Both also available in 230 vol, 50 cycle, add suffix "-220" to order no. Please specify when ordering.

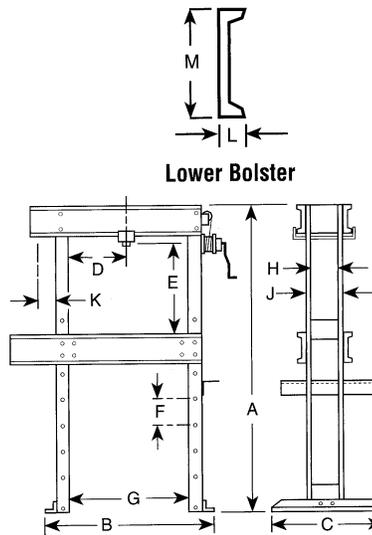

DIMENSIONS (in.)

A	B	C	D*	E	F	G	H	J	L	M	Floor Space
68	43	28.00	3 - 29	6.88-43.38	4.50	32	5.50	6.50	2.50	8.00	43 x 28

* Lateral head movement

ORDERING INFORMATION ECONOMY PRESS

Cap (tons)	Type Ram Used	Stroke	Ram Model	Order No.	Speed (in/min)**		Type Pump	Valve Type	Pump Model	Wt. (lbs)
					Advance	Pressing				
25	Single Acting	6.25	C256C	SPA256	9.8	1.2	Air	2-Way Foot	PA6	578
			C256C	SPM256	.129 in./stroke	.03 in./stroke	Hand	Load-Release	P59	595
			C256C	SPE256	46.6	3.3	Elect.	2-Way *	PE172	607

ORDERING INFORMATION OPEN THROAT PRESS

Cap (tons)	Type Ram Used	Stroke	Ram Model	Order No.	Speed (in/min)**		Type Pump	Valve Type	Pump Model	Wt. (lbs)
					Advance	Pressing				
25	Single Acting	4.25	C2514C	SPA2514	9.8	1.2	Air	2-Way Foot	PA6	683
			C2514C	SPM2514	.49 in./stroke	.03 in./stroke	Hand	Load-Release	P159	693
			C2514C	SPE2514	46.6	3.3	Elect.	2-Way *	PE172	655
			C2514C	SPE2514S	52	4.0	Elect.	3-Way***	PE213S	759
	Double Acting	4.25	RD2514	SPE2514DS	52	4.0	Elect.	4-Way***	PE214S	787

*Holds pressure with motor shut off. Also has an automatic dump setting. Furnished with a 10' remote motor control.

**Typical performance based on 100 p.s.i and 10,000 p.s.i. pump specifications. Actual speeds vary with operating conditions.

***Holds pressure with motor shut off. Also has an automatic dump setting. Furnished with a 10' remote motor control.

Pump standard with press. Other Power Team pumps can be substituted.

dBA at idle and 10,000 psi: PE172-67/81 dBA; PE21-70 dBA measured at 3 foot distance, all sides.