

10 TON BENCH AND FLOOR PRESSES



Ideal for low force pressing jobs; repairing small motors, armatures, removing and installing gears, bearings, other press-fit parts. Bench press has 15.38" x 18.00" work area; floor press bed height is adjustable from 5.00" to 41.00" with horizontal "daylight" of 21.00"

- **HYDRAULIC POWER CHOICES OF SINGLE SPEED HAND PUMP OR QUARTER HORSE® ELECTRIC/HYDRAULIC HAND PUMP.**
- **HYDRAULIC GAUGES, HOSES AND FITTINGS INCLUDED.**

SPECIFICATIONS

Pump electrical specifications

PE10 Series - 1/4 h.p., 115 volt, 60 cycle, single phase. Also available in 230 volt, 50 cycle, add suffix "-220" to order no. Please specify when ordering.

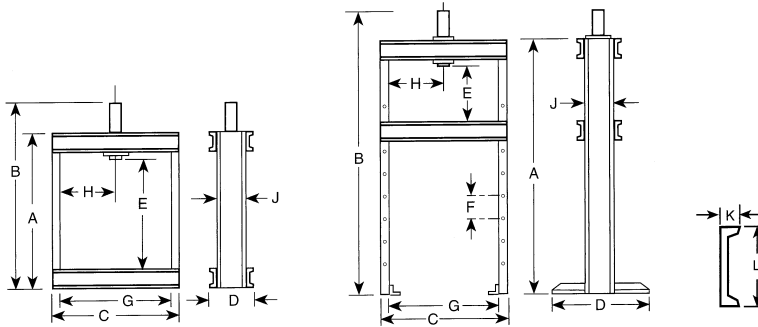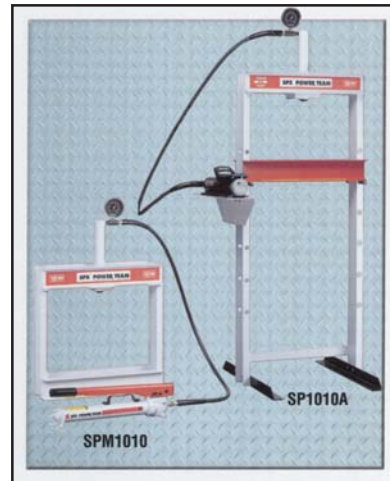

DIMENSIONS (in.)

Frame	A	B	C	D	E	F	G	H	J	K	L	Bench Space	Floor Space (in.)
Bench	24.50	33.13	25.25	7.18	15.38	-	22.00	11.00	4.00	1.58	4.00	7.18 x 25.25	-
Floor	59.00	67.63	25.25	28.00	5.00-41.00	6.00	22.00	2.50-18.50*	4.00	1.58	4.00	-	28 x 28.25

*Lateral head movement

ORDERING INFORMATION

Cap (Tons)	Type Ram Used	Stroke	Ram Model	Order No.	Speed (in/min)***		Type Pump	Pump Model
					Advance	Pressing		
10 Bench	Single Acting	10.13"	C1010	SPM1010	.06 in./stroke		Hand	P55
10 Floor	Single Acting	10.00"	C1010	SPH1010	.06 in./stroke		Hand	P55
10 Floor	Single Acting	10.00"	C1010C	SPE1010	0.2	2.2	Elect**	PE102
10 Floor	Single Acting	10.00"	RD1010	SP1010A	0.3	3.7	Air	PA94
10 Floor	Double Acting	10.00"	RD1010	SPE1010D	0.2	2.2	Elect**	PE104

*Optional air/hydraulic pumps available on request

**"Advance" position holds pressure with motor shut off. "Return" position advances cylinder with motor running and returns cylinder with motor shut off.

***Typical performance based on 100 p.s.i. and 10,000 p.s.i. pump specifications. Actual speeds may vary with operating conditions.